


## WHA 2000 – WATER HAMMER ARRESTER



### DIMENSIONS

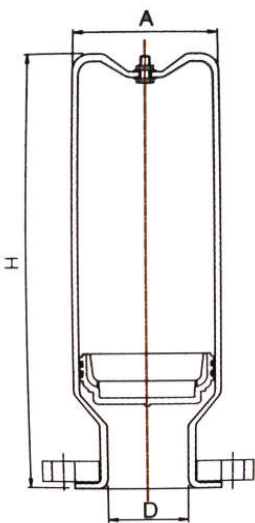

TYPE	SIZE		DIMENSION (MM)		AIR VOLUME (L)	WEIGHT (KG)
	MM	INS	H	A		
WHA-2040	40	1.1/2"	245	79.38	1.1	7.5
WHA-2050	50	2"	260	79.38	1.2	8.0
WHA-2065	65	2.1/2"	265	104.78	2.1	9.2
WHA-2080	80	3"	285	104.78	2.4	9.6
WHA-20100	100	4"	320	130.18	3.4	13.2
WHA-20125	125	5"	330	155.58	4.6	15
WHA-20150	150	6"	370	155.58	5.2	16.8
WHA-20200	200	8"	450	155.58	7.0	17.3

### TECHNICAL INFORMATION

- ▶ Operating pressure : 16 kgf/cm<sup>2</sup>
- ▶ Maximum operating pressure : 32 kgf/cm<sup>2</sup>
- ▶ Maximum operating temperature : 100 °C
- ▶ Air pressure : 4 ~ 5.5 kgf/cm<sup>2</sup>
- ▶ Connection: Flange end JIS 10K
- ▶ Application: Water system, Fire Fighting

### FEATURES

Instead of using the air bladder made of rubber to suppress the occurrence of impact pressure, pistons are used which guarantees semi-permanent life span. This product can be used even under high pump pressure, and can sanitarily and safely be used in the water supply pump. Body is made of 4~6 inch copper tube which has been molded. As a basic value, air pressure of 4.0kgf/cm<sup>2</sup> has been filled at the time of delivery. As air pressure may vary according to the purpose and projects of users, this product can be made to order. Quality is assured as the volume appropriateness and reliability have been proven through 100,000 cycle tests.